





输入属于NPN型，不需要外接电源，直接短接COM和X点即可

ADC0- ADC0+	ADC1- ADC1+	D110	D111	0_10V to 0_4095
V10- V10+	V11- V11+	D124	D125	NTCB值3435 K ±1% R(25 °C)=10K ±1% -50度-150度
DAC0- DAC0+	DAC1- DAC1+	D126	D127	0_10000 to 0_10V



### MC-24MR-4MT-F800-FX-B

晶体管Y点内部已串1K电阻

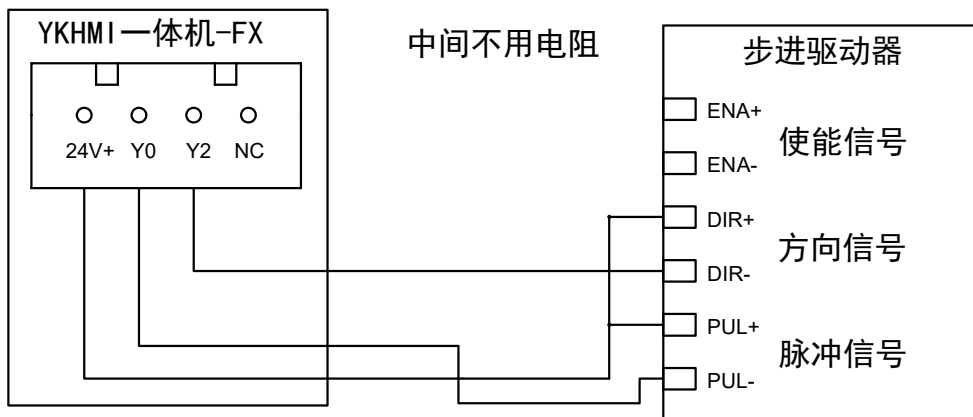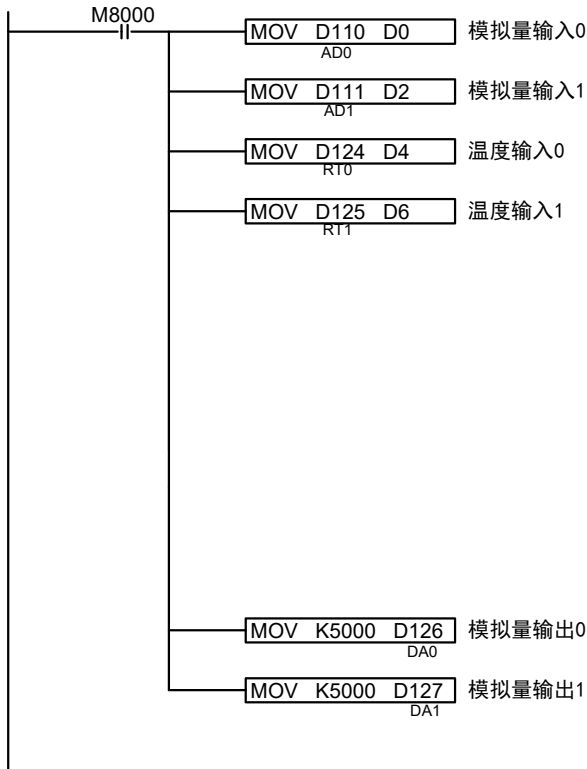

产品合格证

生产日期		检验结论	合格	检验员	
------	--	------	----	-----	--