


输入属于NPN型，不需要外接电源，  
直接短接COM和X点即可





### MC-14MR-4MTS-MD100-FX-B

晶体管Y点内部  
已串1K电阻



- AD0+ D110
- AD0- 0\_10V to 0\_4095
- AD1+ D111
- AD1- 0\_10V to 0\_4095
- DA0+ D126
- DA0- 0\_10000 to 0\_10V
- DA1+ D127
- DA1- 0\_10000 to 0\_10V

- 触摸屏USB 鼠标接口
- 触摸屏 下载口
- PLC 下载口
- PLC运行开关

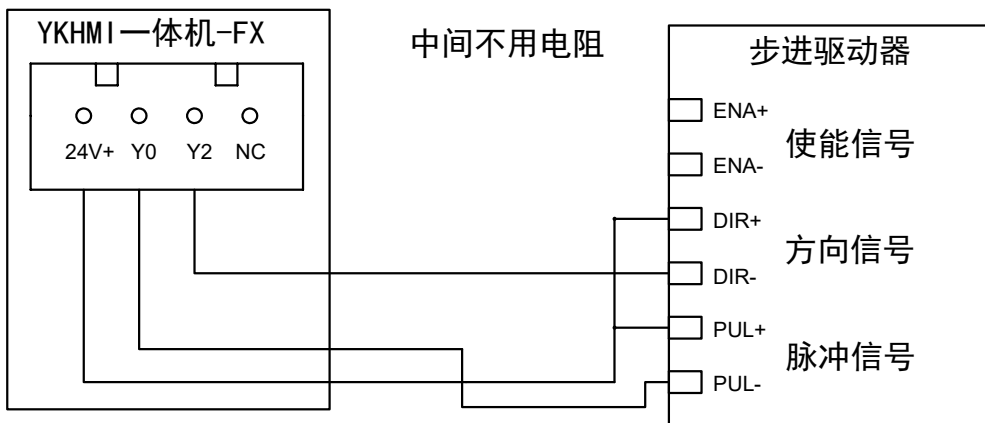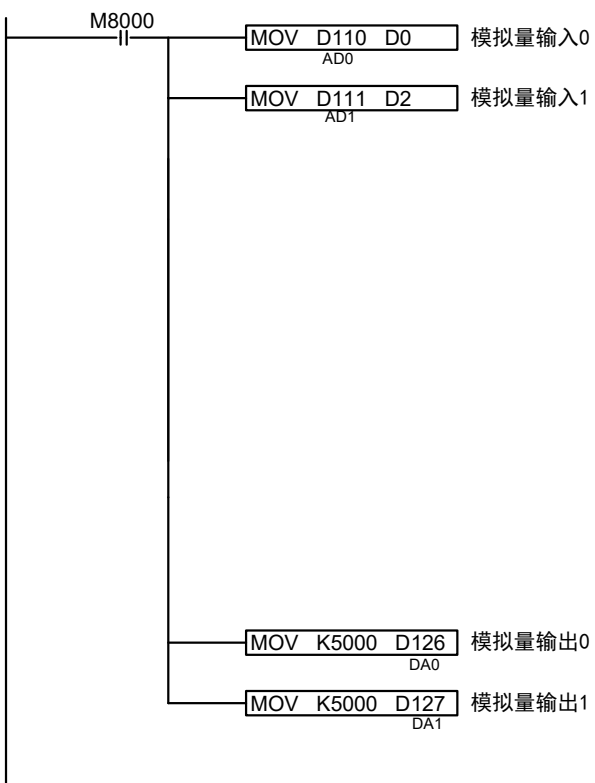

产品合格证

生产日期		检验结论	合格	检验员	
------	--	------	----	-----	--